


Drawn / Date M.A. 15/02/00	App. by / Date MS 31/08/18	Date of issue 31/08/18	Rev. 10	DCN 18-067
-------------------------------	-------------------------------	---------------------------	------------	---------------

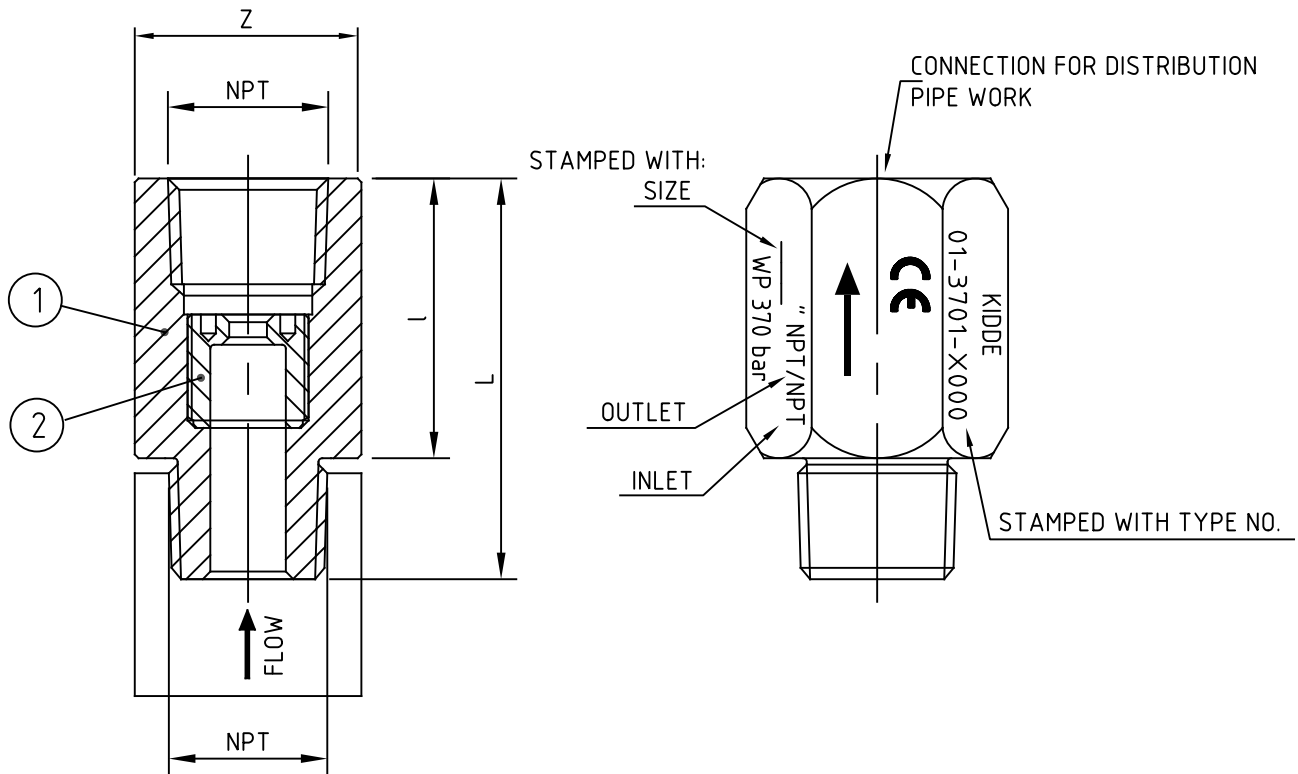

POS	DESCRIPTION	01-3701-1030/1070	01-3701-3030/3180	01-3701-4030/4270	01-3701-5300/5360
1.	BODY				
	MATERIAL	BRASS CuZn39Pb3 WNr. 2.0401 DIN 17660			
	LENGHT L	54	70	85	95
	LENGHT l	37	48	61	68
	SIZE	1/2"	1"	1-1/2"	2"
	INLET MA	NPT	NPT	NPT	NPT
	OUTLET FE	NPT	NPT	NPT	NPT
	A/F HEX. Z	30	50	65	90
	PART NO.	01-3701-1001	01-3701-3001	01-3701-4001	01-3701-5001
	WEIGHT APPR.	0.25 kg	0.8 kg	1.3 kg	3.0 kg
2.	ORIFICE DIA.	ø3 - ø7 mm	ø3 - ø18 mm	ø3 - ø27 mm	ø3 - ø36 mm
	MATERIAL	BRASS CuZn39Pb3 WNr. 2.0401 DIN 17660			
	THREAD / LENGTH	M16x1 / 15mm	M27x1 / 21mm	M42x1.5 / 32mm	M52 x 1.5 / 35mm
	PART NO.	01-3700-1030/1070	01-3700-3030/3180	01-3700-4030/4270	01-3700-5300/5360

NOTE: ONLY 1-1/2" AND 2" RESTRICTORS TO BE CE MARKED

NOTE: ORIFICE DIAMETER TO BE SPECIFIED AT ORDER. 1/2" & 1": INCREMENT 0.5mm

1 1/2": INCREMENT 0.5mm ø3-ø18, above ø18: 1.0mm

2": INCREMENT 1.0mm

WORKING PRESSURE : 370 bar at 50°C

TEST PRESSURE : 555 bar

TEMPERATURE RANGE : -20°C to 50°C (ISO 14520/EN 12094)

: -29°C to 55°C (NFPA 2001/UL 2127 DRAFT)