

Made by/Date
MA /25.04.01


App. by/Date
RK/05.02.02

Date of issue
05.02.02



Rev.
1 5592

Page
1 of 1

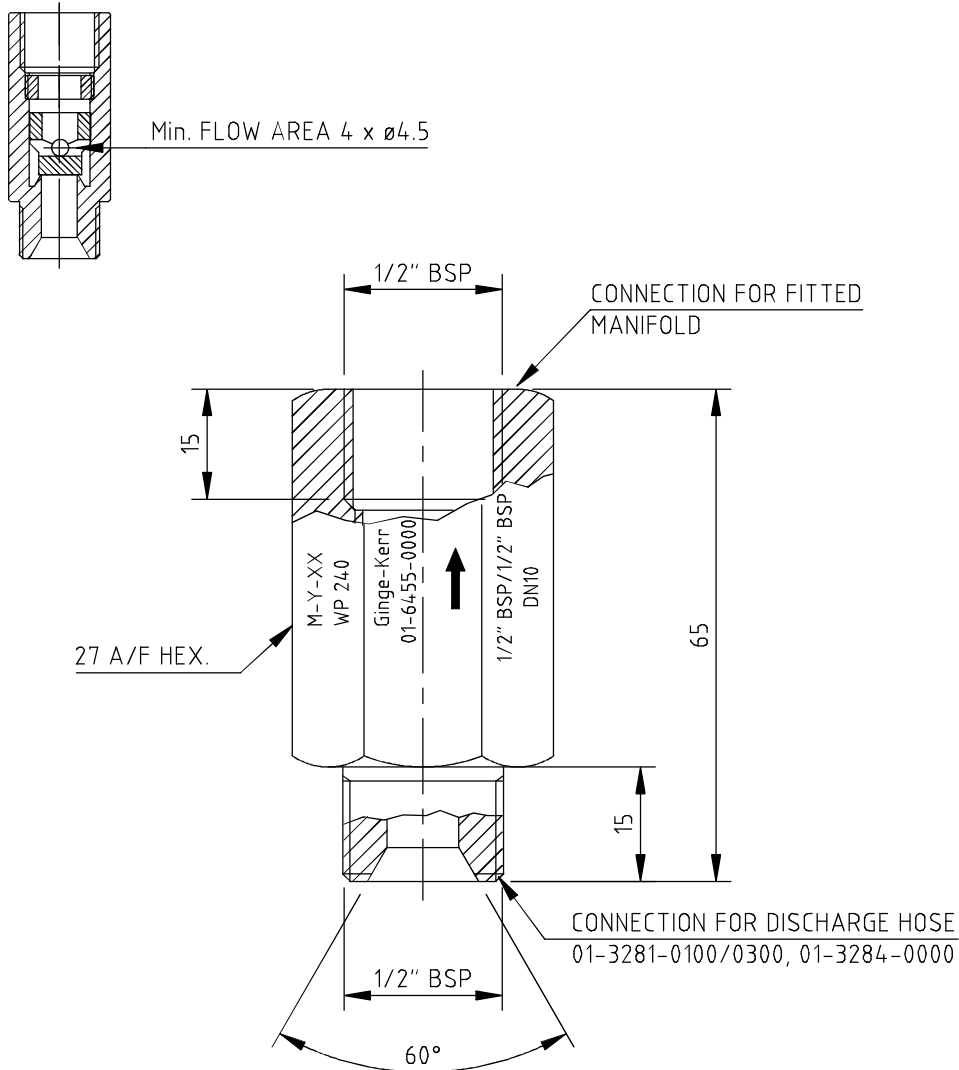

MATERIAL:	
BODY	: BRASS CuZn39Pb3. WNr. 2.0401 DIN 17660
PLUNGER	: GLASFIBRE REINFORCED NYLON
LEAK RATE	: MAX. 1L/min/20 bar
MIN. AREA	: 61 mm ² /ø9mm
TEMPERATURE RANGE	: -20°C to 50°C (ISO 14520/EN 12094) -29°C to 55°C (NFPA 2001/UL 2127 DRAFT)
WORKING PRESSURE	: 240 bar
TEST PRESSURE	: 360 bar
BURSTING PRESSURE	: 720 bar
WEIGHT	: 0.165 kg