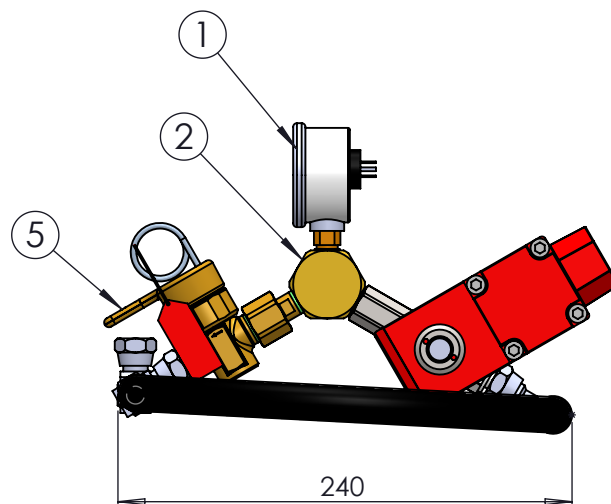
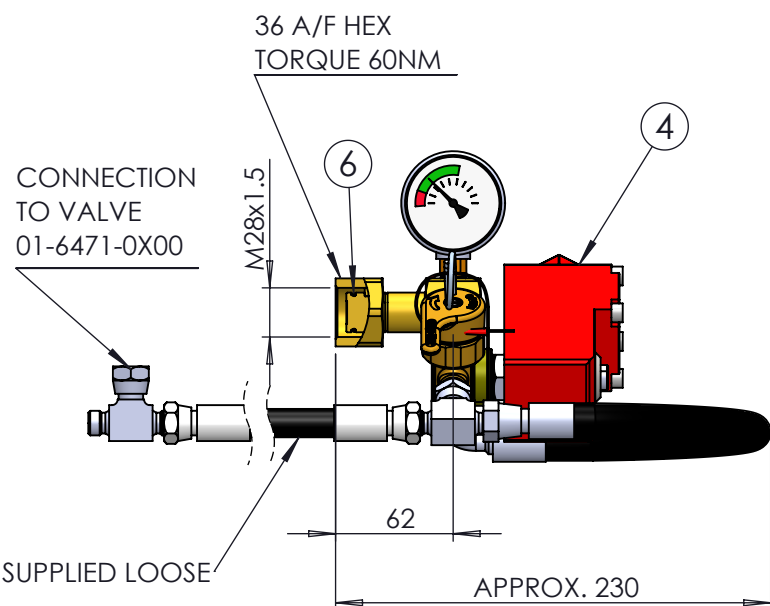


Drawn / Date
JIM 24/08/00

App. by / Date
MS 17/02/26

Date of issue
17/02/26

Rev.
8

DCN
25-054


NOMINAL PRESS., BAR	SCALE, BAR	MAX. WORKING PRESS., BAR	TEST PRESS., BAR	NORMALLY CLOSED, BAR	NORMALLY OPEN, BAR	KFP P/N
300	240-400	370	555	=> INCR. 240	< DECR. 240	01-7172-1309

1. PRESSURE GAUGE	15-8025-0300, ST.ST. CASING, BRASS CONNECTION, 300 BAR N.C. >= 240 BAR
CONTACT	GOLD PLATED, 4.5 - 24 VDC, 5-100 mA, 2.4W
DIAMETER	DIA. 63MM
ACCURACY CLASS	1.6 IN SCALE
PROTECTION	IP 65
2. BLOCK	BRASS
3. CONNECTOR	15-8020-0000, SINGLE CORE CABLE 1.5MM X 500MM INCL. SILICONE RUBBER RED IEC 228 CLASS 5
4. SOLENOID VALVE	15-8240-0047
PROTECTION	ATEX II 2GD Ex d IIC T6 Gb
VALVE SEAT DIA.	ø0.8MM
5. MANUAL RELEASE UNIT	01-4162-0000, BRASS 1/4" BSPP
6. SPARE O-RING	15-0181-0300
7. GLAND ENTRY	M20
8. AMBIENT TEMP. RANGE	-20°C TO 50°C
9. WEIGHT APPROX.	2.95 KG

sales@norrscope.com
