



Drawn / Date
PU 11/06/10

App. by / Date
MS 20/03/19

Date of issue
20/03/19



Rev.
6

DCN
17-006

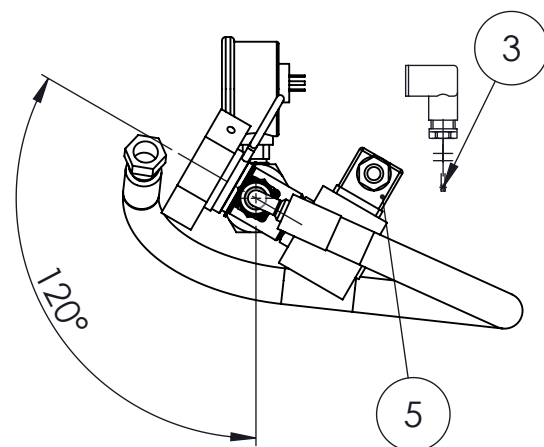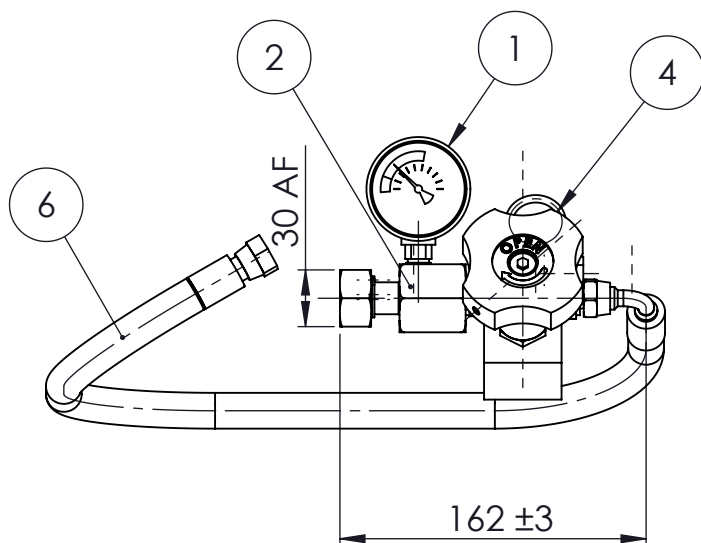

NOM. PRESS. BAR	SCALE BAR	MAX. W.P. BAR	T.P. BAR	N.C. BAR	N.O. BAR
300	240 - 400	370	555	> INCREASING 240	< DECREASING 240

CONTACT NON PRESSURIZED



PIN: 1 & 2 FOR N. C. OPERATION
PIN: 3 FOR OPTIONAL USE

- | | | |
|----|---|--|
| 1. | CONTACT PRESSURE GAUGE
CONTACT (15-8020-0300) | : STAINLESS STEEL CASING
: GOLD PLATED
VOLTAGE 4.5 - 24V DC/VAC
CURRENT 5 - 100 mA
CONTACT LOAD 2.4W Max.

DIAMETER : ø55MM
ACCURACY CLASS : 1.6 IN SCALE
WEATHER PROTECTION : IP 65 |
| 2. | BLOCK
SPARE O-RING | : BRASS
: P/N 15-0181-0007 |
| 3. | SINGLE CORE CABLE | : 1.5MM ² X 500MM INCL. SILICONE RUBBER
RED IEC 228 CLASS 5 |
| 4. | SOLENOID VALVE

WEATHER PROTECTION
VALVE N.C.
VALVE SEAT DIA. | : 2/2 24V DC 13W
: (MAX. MONITORING CURRENT 0.14A @ 4V)
: IP65

: ø0.7MM |
| 5. | CABLE GLAND PG9 | : INCL. |
| 6. | ACTUATION LINE HOSE
TEMPERATURE RANGE
WEIGHT | : WP 400 BAR (01-3273-1200)
: -20°C TO 50°C
: 2 Kg |