







Drawn / Date
TF 20/11/25

App. by / Date
MS 20/11/25

Date of issue
20/11/25

Rev.
A

DCN
25-048

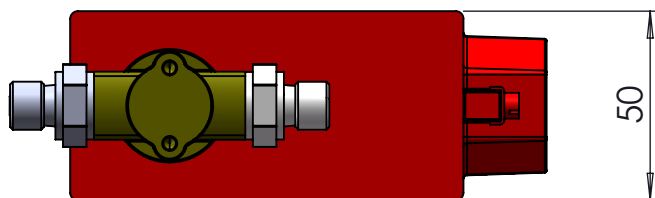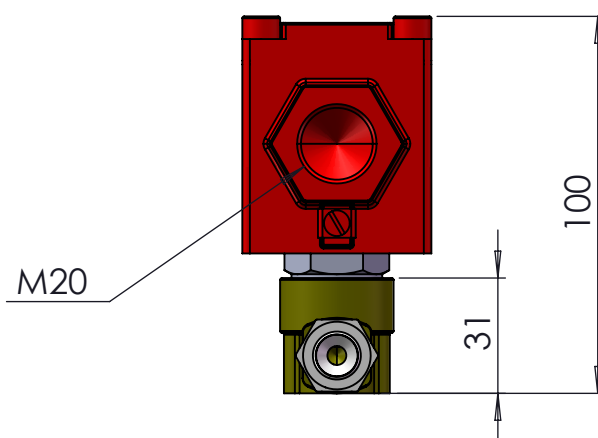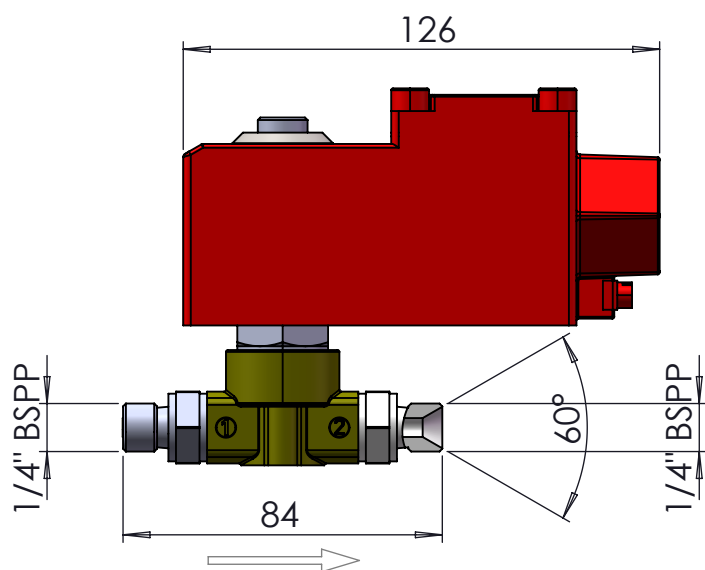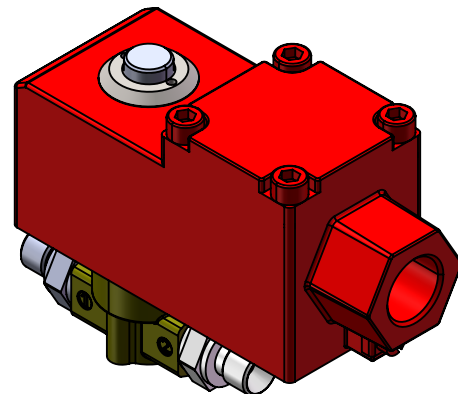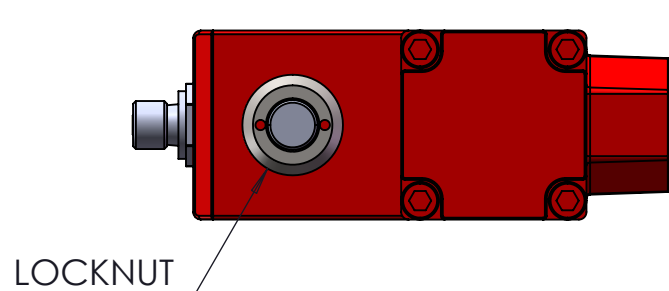

MATERIAL:

BODY	- CuZn39Pb2
TUBE & PLUNGER	- STAINLESS STEEL
COIL CASING	- LIGHT ALLOY

TECHNICAL SPECIFICATIONS:

VALVE SEAT	- Ø 0.8MM
SEAL	- GLASS FIBRE 30% REINFORCED TEFLON
TEMP. RANGE	- -20°C TO 50°C (ISO 1450 / EN12094)
	- -29°C TO 55°C (NFPA 2001 / UL 2127)
POWER CONSUMPTION	- 24VDC 15W
Eex CLASSIFICATION	- ATEX II 2GD Ex d IIC T6 Gb
	- TI22 ATEX 278X
GLAND ENTRY	- M20
OPENING / CLOSING TIME	- LOWER OR EQUAL 20msec
WORKING PRESSURE	- 370 BAR @ 50°C
TEST PRESSURE	- 555 BAR
WEIGHT	- APPROX. 0.6KG