


Kidde ECS Fire Suppression System Component Description

Flexible Discharge Hoses

FEATURES

- For Use with UL Listed, ULC Listed and FM Approved Systems
- See Kidde® Manual 06-236225-001 for USCG Approval
- RoHS Compliant

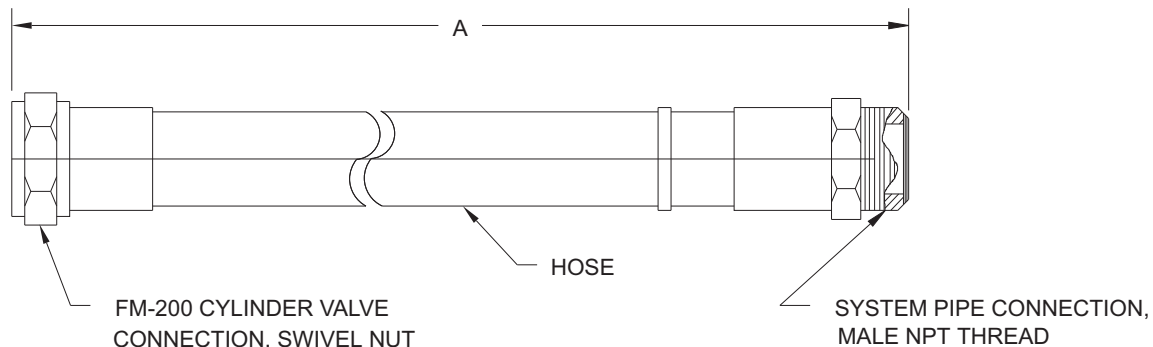

TECHNICAL DATA

- Minimum Bursting Pressure: 2000 PSI
- Working Pressure: 500 PSI
- Proof Pressure: 1000 PSI

MATERIALS

- Hose: Reinforced Rubber Hose
- Fitting: Cadmium-plated Steel

Part Number	Male NPT	A	Min. Bend Radius
WK-283898-000	1 1/2	24	10.5
WK-283899-000	2	31	13.5
WK-283900-000	2 1/2	48	22.5
06-118225-001	3	54	24

Dimensions are in inches.

COMPATIBILITY

Series	For Use With
Kidde ECS HFC-227ea	X
Kidde ECS Advanced Delivery FM-200®	X

sales@norrscope.com

FM-200 is a registered trademark of E.I. du Pont de Nemours and Company.
Kidde is a registered trademark of Kidde-Fenwal Inc. All other trademarks are the property of their respective owners.