

Kidde Fire Systems

HPCO₂ Component Description



Effective: October 2023
K-81-8020 Rev AA

Electric Control Head, 24V

FEATURES

- *Underwriters' Laboratories Listed - File Number EX923*
- *FM Approved, Standard 5420*
- *CSA Certified*
- *NFPA 12 Compliant*
- *Compatible with Aegis, Aries panels*
- *Momentary Current Draw*
- *Factory wired 14AWG leads*
- *Easily resettable*

DESCRIPTION

The Kidde Fire Systems High-Pressure Carbon Dioxide (CO₂) Electric Control Head (ECH) provides remote electric and local manual operation of the agent cylinders, remote actuation cylinders or directional (stop) valves. The ECH operates electrically from a Kidde Fire Systems Aegis or Aries style suppression control panel and incorporates an integral lever, with removable locking pin, for local manual operation. The ECH contains a microswitch whose contacts break the electrical circuit to the solenoid after operating the ECH, which reduces the overall power consumption of the fire suppression system. Upon operation of the ECH, the actuating pin latches in the released position and must be mechanically reset in accordance with the applicable system manual. Kidde Fire Systems provides a loose tamper seal to be affixed through the manual lever after performing commissioning or periodic preventive maintenance in accordance with the applicable system manual.

REFERENCED COMPONENTS

Description	Reference Data Sheet
HPCO ₂ Cylinders	K-81-1010
	K-81-1020
Remote Actuation Cylinder	K-81-5050
Stop Valves	K-81-5130
	K-81-5140
	K-81-5150
Aegis™ Conventional Control Panel	K-84-200
Aries® Addressable Control Panel	K-76-650
	K-76-850

ORDERING INFORMATION

Description	Part Number
Electric Control Head, 24VDC	WK-890181-200

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. believes this data to be accurate, but it is published and presented without any guarantee or warranty whatsoever. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The fire suppression system design, installation, maintenance, service and troubleshooting must be performed by trained, authorized Kidde Fire Systems distributors for the product to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721 USA.

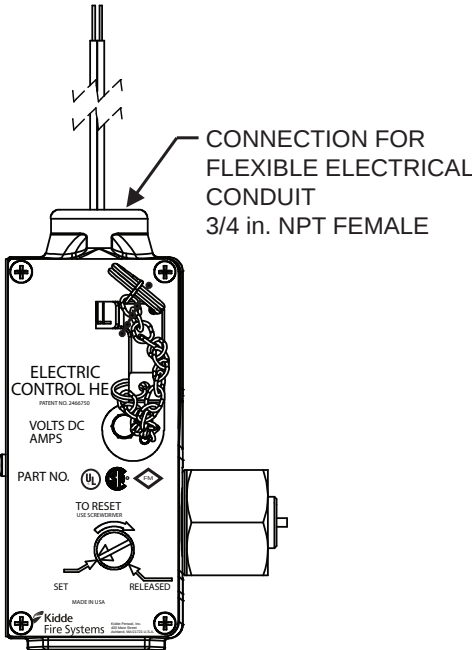


Figure 1. Electric Control Head

DIMENSIONS

Height (in.)	Width, inc. swivel nut (in.)	Depth (in.)
6.36	4.00	2.31

SPECIFICATIONS

Part Number	Control Head		Remarks
	Voltage	Amps	
WK-890181-200	24 VDC	2.4 momentary	See panel manual for compatibility

EXPORT INFORMATION (USA)

Jurisdiction: EAR
Classification: EAR99
This document contains technical data subject to the EAR.
All trademarks are the property of their respective owners.
©2023 Kidde-Fenwal, Inc.

sales@norrscope.com