


Flexible Discharge Hose

FEATURES

- For Approvals, see the “COMPATIBILITY” table on page 2.

P/N: WK-28389X-000

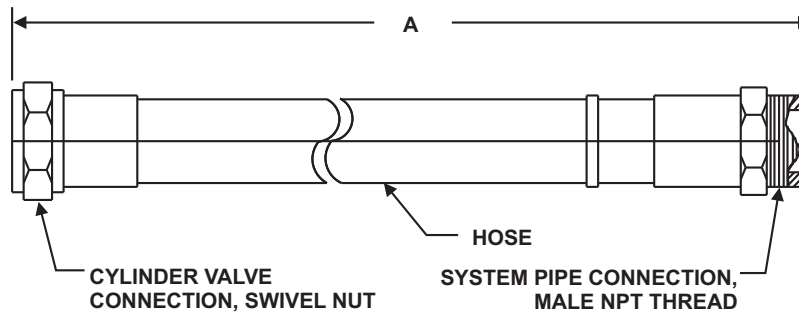

TECHNICAL DATA

- Minimum Bursting Pressure: 2000 PSI (137.9 bar)
- Working Pressure: 500 PSI (34.5 bar)
- Proof Pressure: 1000 PSI (68.9 bar)
- Minimum Bend Radius
 - WK-283898-000: 20 in (508 mm)
 - WK-283899-000: 25 1/2 in (648 mm)

MATERIALS for WK-283898-000

- Hose: Reinforced Rubber Hose
- Fitting: Plated Steel

MATERIALS for WK-283899-000

- Hose: Reinforced Rubber Hose
- Fitting: Plated Steel

ORDERING INFORMATION

Part Number	Hose Size	Thread/ Outlet	Dimension A	Min. Bend Radius	Fittings Material
WK-283898-000	1-1/2 in (40 mm)	NPT	24 in (610 mm)	20 in (508 mm)	Plated Steel
WK-283899-000	2 in (50 mm)	NPT	31 in (787 mm)	25 1/2 in (648 mm)	Plated Steel

COMPATIBILITY

Series	DIOM P/N	Approvals
Kidde Fire Systems ECS-500™ System	06-237585-001	UL, ULC, FM
Kidde Fire Systems ECS-500™ Marine System	06-237589-001	UL, ULC, USCG
Kidde Fire Systems ECS™ 360 for use with Fluoroketone Fire Suppression Agents	06-236553-001	UL, ULC, FM
Kidde Fire Systems ECS™ 360 Marine for use with Fluoroketone Fire Suppression Agents	06-236559-001	UL, ULC, USCG
Kidde Fire Systems ECS™ 360 with HFC-227ea Agent	06-236115-001	UL, ULC, FM
Kidde Fire Systems Modular ECS™ 360 with HFC-227ea Agent	06-236116-001	UL, ULC, FM
Kidde Fire Systems ECS™ 360 Marine with HFC-227ea Agent	06-236225-001	UL, USCG

sales@norrscope.com