

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

2017

© COPYRIGHT2017

BY - TE CONNECTIVITY

ALL RIGHTS RESERVED.

REVISIONS

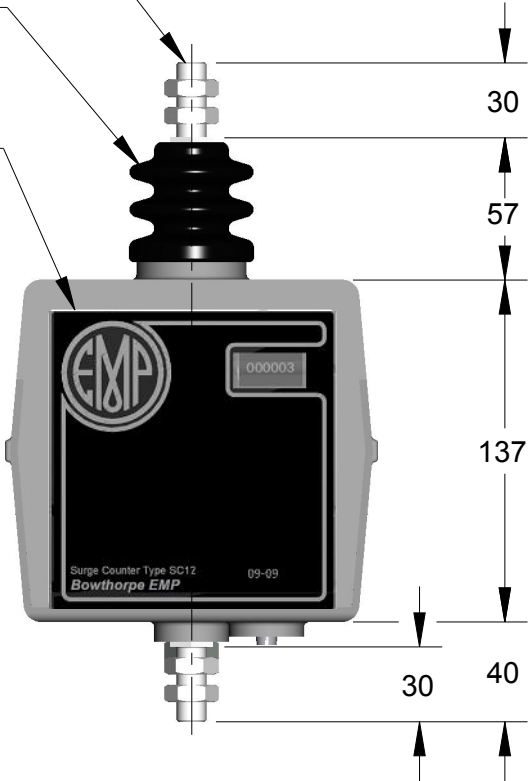
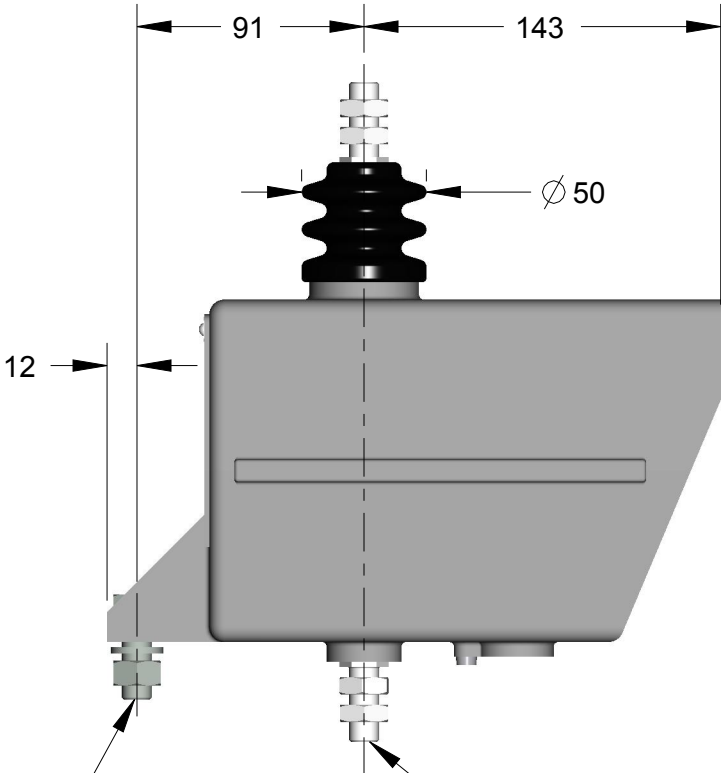
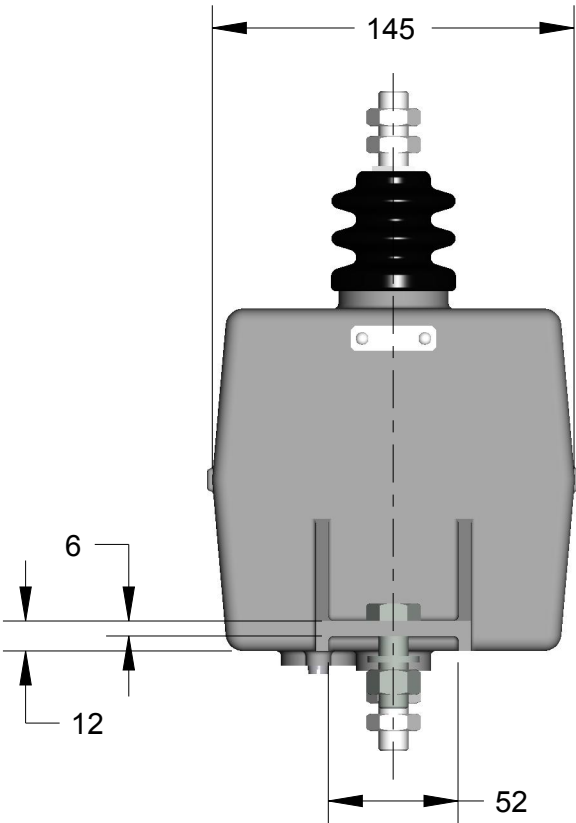
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REDRAWN	14SEP2017	VF	EFG

SURGE COUNTER  
TYPE SC12

LINE TERMINATION M12 NICKEL  
PLATED BRASS FITTED WITH  
2-NICKEL PLATED BRASS LOCKNUTS

MOULDED RESIN  
INSULATOR

HERMETICALLY SEALED  
GLASS DISPLAY PANEL





M12x35 GALVANISED  
STEEL SET SCREW  
WITH FULLNUT AND  
SPRING WASHER

GROUND TERMINATION M12 NICKEL  
PLATED BRASS FITTED WITH  
2-NICKEL PLATED BRASS LOCKNUTS

MAX. TIGHTENING TORQUE FOR CONNECTIONS AND MOUNTINGS 40 Nm  
COUNTER CASE OF DIE CAST SILICON ALUMINIUM EPOXY POWDER COATED  
PROTECTION CLASSIFICATION IP 67  
WEIGHT 2.7 kg APPROX.

ALL DIMENSIONS NOMINAL  
UNLESS SPECIFIED

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	14SEP2017	 TE Connectivity		
		CHK	14SEP2017			
DIMENSIONS: mm		APVD	14SEP2017	NAME SURGE COUNTER TYPE: BOW-I-SC12		
		PRODUCT SPEC	S.A.KUMAR			
		APPLICATION SPEC	-	SIZE A3		
		WEIGHT	NOTE			
MATERIAL		FINISH	-	CAGE CODE	00779	DRAWING NO
-		-	-	C=LA-17001		RESTRICTED TO
-		-	-	SCALE		SHEET
				NTS		1 OF 1
						REV
						C