

Made by/Date
MA / 03.02.05

App. by/Date
RK/03.02.05

Date of issue
3.11.10




Rev.
3

DCN10-042

Page
1

of
1

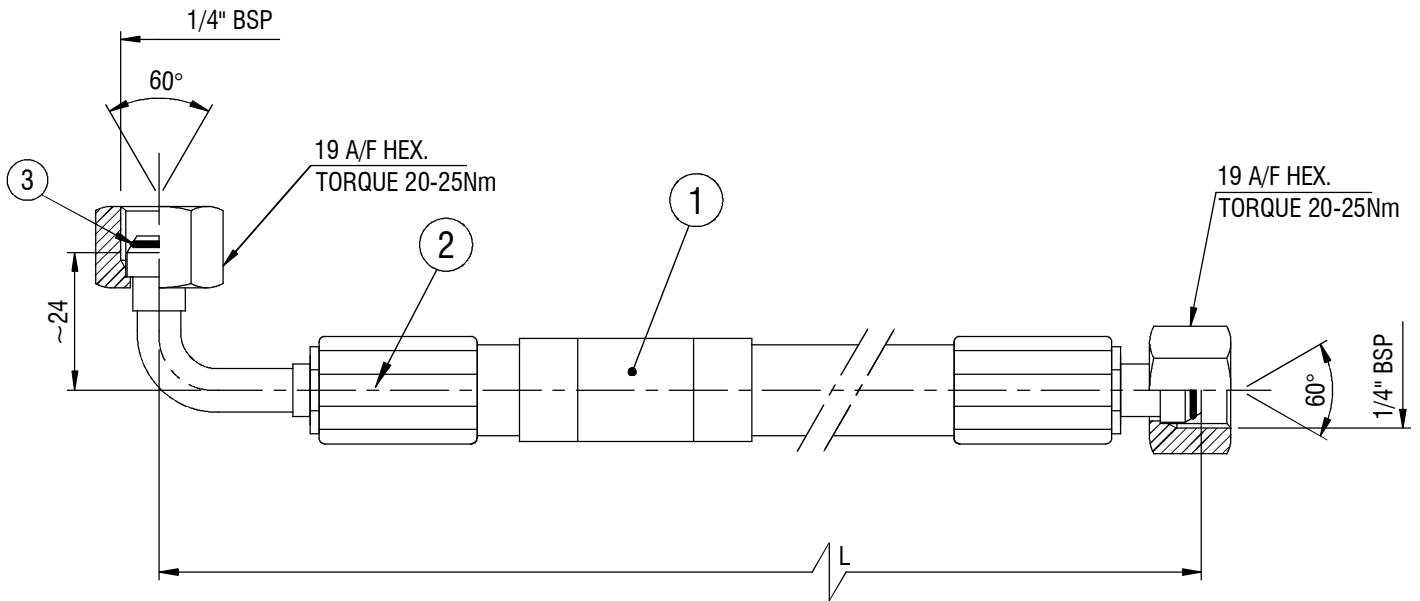

PART NO.	L	WEIGHT
01-3273-1020	200 mm	0.140 kg
01-3273-1050	250 mm	0.160 kg
01-3273-1100	300 mm	0.180 kg
01-3273-1140	400 mm	0.230 kg
01-3273-1150	450 mm	0.250 kg
01-3273-1200	700 mm	0.320 kg

MATERIAL:

- POS 1. HOSE : SBR AND NITRILE RUBBER, OIL RESISTANT WITH REINFORCEMENT WIRE. SAE 100 R2 DIN 20022
- SPECIFICATION : EN 853, 2 SN
- POS 2. COUPLING : STEEL, ZINC PLATED
- POS. 3 O-RING : $\varnothing 6.5 \times \varnothing 1.0$ NBR SHORE 80 (P/N 15-0181-0005)
- WORKING PRESSURE NOMINAL : 400 bar
- BURSTING PRESSURE MIN. : 1600 bar
- BENDING RADIUS : Min. 100 mm
- TEMPERATURE RANGE : -40°C TO 100°C