






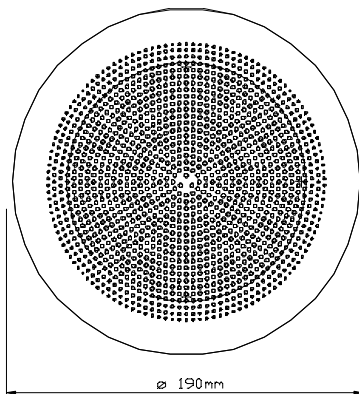

DNH

BPF-560(T)

ISO 9001 CERTIFIED

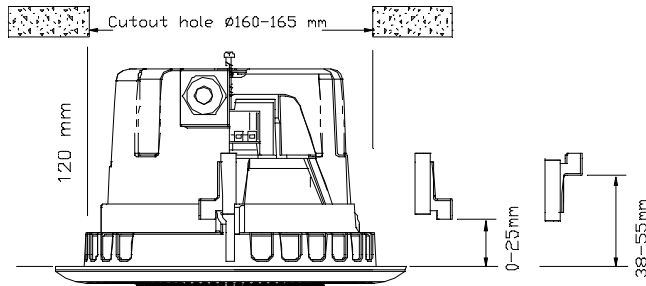

| 70/100 Volt combined transformer | |
|----------------------------------|-------|
| Primary connections | |
| White : Green | 70 V |
| White : Red | 100 V |
| Secondary nominal tapings | |
| C : 6 | 6,0 W |
| C : 3 | 3,0 W |
| C : 1,5 | 1,5 W |
| C : 0,5 | 0,5 W |

Sound pressure levels at different frequencies at 1W/1m P-5/15B



Specifications

| | |
|-------------------------------|----------------------------|
| Material / Color | PA / ABS / RAL9010 |
| Mounting | Hooks |
| Termination | Spring Clamp |
| Weight w/transformer | 0,9 kg |
| IP-rating | |
| Max. / min. amb. temp | 90°C / -20°C |
| Rated / max. power | 6 W / 10 W |
| SPL 1W/1m | 90 dB |
| SPL rated power | 97 dB |
| Effective freq. range | 190 – 20000 Hz |
| Dispersion (-6dB) 1kHz / 4kHz | 200° / 62° |
| Directivity factor, Q 1kHz | 1,8 |
| Options | Impedances, colors, labels |

Installation, Operation and Maintenance Procedures

- Install the ring into the cut-out hole turning the screws connected to the three hooks, screw clockwise until the ring is fixed to the ceiling.
- Lead cable through cable gland and connect to terminal. Screw box back into place with one screw.
- Turn the grill gently clockwise within the ring until it stops.
- Hooks can be mounted both ways, see drawing at the top of the page.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Take care when the loudspeaker is energized. (100V or 70V)
- Do not open loudspeaker when energized.

DNH reserves the right to alter specifications without notice

