





DNH

LP-210(T)

ISO 9001 CERTIFIED

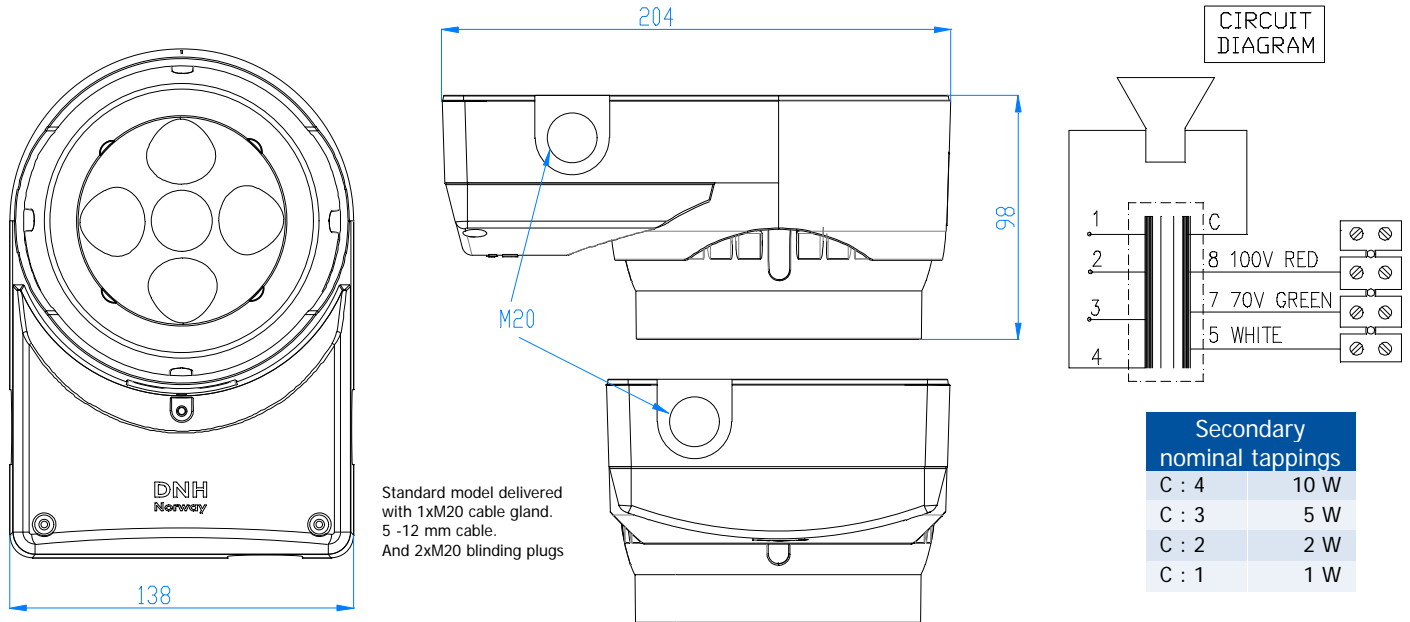

Sound pressure levels at 1W/1m w/P-5/15 PS

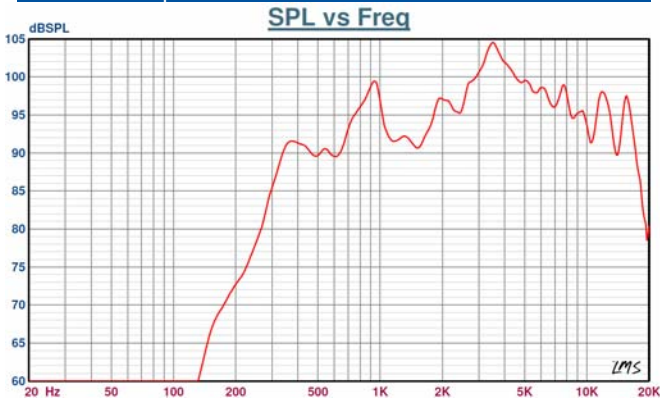

Specifications

Material / Color	Polyamide UL94 V0 / RAL 7035
Mounting	Screws and keyhole
Termination	Spring clamps
Weight w/transformer	1 Kg
IP-rating	56
Max. / min. amb. temp	90°C / -20°C
Rated / max. power	10 W / 10 W
SPL 1W/1m	101 dB
SPL rated power	111 dB
Effective freq. range	300 – 20000 Hz
Dispersion (-6dB) 1kHz / 4kHz	° / °
Directivity factor, Q	
Options	Impedances, colors, labels

Installation, Operation and Maintenance Procedures

- Remove the front lid by three screws.
- Screw the loudspeaker to wall or ceiling by three screws.
- Lead cable through cable gland, connect to terminal (70V or 100V) and select required tapping in to the transformer.
- To change the direction of the loudspeaker adjust the sound unit into the required direction.
- Screw the lid back into place by three screws.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open the loudspeaker when energized.
- This loudspeaker is supplied with a two years warranty against defective workmanship.

DNH reserves the right to alter specifications without notice

