




# DNH

## VEP-15(T)

ISO 9001 CERTIFIED

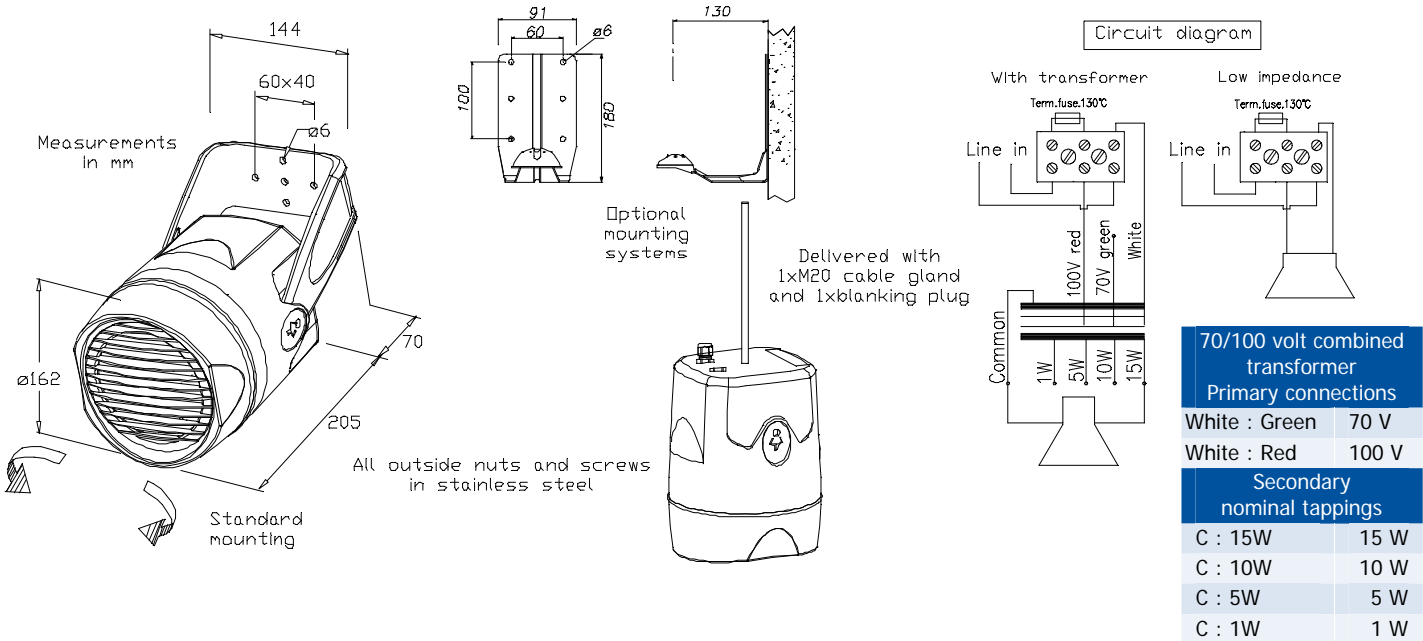

Sound pressure levels at 1W/1m P-5/15B



Specifications

|                               |                           |
|-------------------------------|---------------------------|
| Material / Color              | ABS / V0 / RAL7035        |
| Mounting                      | Bracket                   |
| Termination                   | Ceramic terminal          |
| Weight w/transformer          | 1,84 kg                   |
| IP-rating                     | 55                        |
| Max. / min. amb. temp         | 90°C / -40°C              |
| Rated / max. power            | 15 W / 20 W               |
| SPL 1W/1m                     | 92 dB                     |
| SPL rated power               | 104 dB                    |
| Effective freq. range         | 150 – 20000 Hz            |
| Dispersion (-6dB) 1kHz / 4kHz | ° / °                     |
| Options                       | Impedance, colors, labels |

### Installation, Operation and Maintenance Procedures

- Fasten bracket with minimum 2 screws.
- To open the loudspeaker turn the front gently counter clockwise and pull.
- Lead cable through cable gland and connect to terminal.
- If 70V, replace red cable with the green cable in the terminal.
- To close the loudspeaker, align the two marks on the front and rear parts, and turn the front gently clockwise till it stops.
- Use the attached stop screw to secure the front from undesirable opening during operation. (Optional)
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship

DNH reserves the right to alter specifications without notice

