PROPAK

PROFESSIONAL FIREFIGHTING BREATHING APPARATUS





HIGH PERFORMANCE PROTECTION.

Scott Safety's Breathing Apparatus is renowned for its high performance, rugged dependability and cutting edge technology.



 For over 30 years its innovative engineering and customer led product evolution has enabled the range to adapt, respond and predict the ever changing needs of professional fire services around the world.

With over one million firefighters worldwide trusting in Scott's equipment and backed by dedicated customer support, Scott's SCBA is the firefighters preferred choice.

The Scott Propak is the latest lightweight self contained breathing apparatus from Scott Safety and offers the highest levels of respiratory protection available.

SETTING THE STANDARD

 Approved to EN137: 2006 Type II, incorporating the stringent Flame Engulfment Test, Propak is refined to a level of performance demanded by the professional firefighter.

• 100% KEVLAR WEBBING WITH WRAP-AROUND

 The highest possible specification providing the highest level of flame retardancy

TRUSTED AND PROVEN HIGH PERFORMANCE PNEUMATICS

- Supplies exceptionally high airflow, simple to maintain and fully user serviceable

EASY UPGRADE PATH

 Following the Scott tradition, all elements of the set are designed to allow future upgrade with minimal cost

RAPID CONNECT CYLINDER BAND


Allows adjustment or change out of cylinder in seconds

TEMPEST DEMAND VALVE

- Proven performance and dependability
- Comfortable and responsive delivery of air
- Easy to breathe

• EASY ADJUST PARACHUTE STYLE BUCKLES

- Quick pull forward action allows easy in-transit adjustment
- Large buckles allow for easy operation with gloved hands and fast donning and doffing

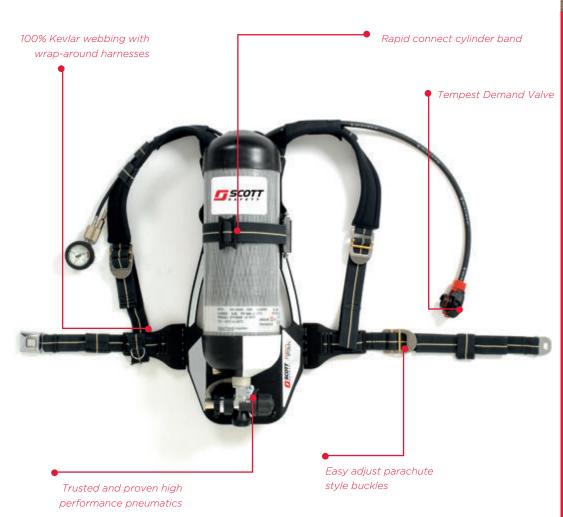



At the heart of the Propak set is a simple and reliable two-stage pneumatic system. A first breath activated positive pressure demand valve provides low breathing resistance and excellent dynamic performance - particularly at high flow rates. A first stage pressure reducing valve features only two moving parts and accepts cylinders pressures of up to 300 bar without adjustment.





MAJOR COMPONENTS

Compact positive pressure demand valve featuring servoassisted, tilting diaphragm mechanism with low inspiratory resistance and responsive dynamic performance, automatic first breath actuation and hands free bypass facility.

REDUCING VALVE

First stage pressure reducing valve featuring non-adjustable, spring loaded piston mechanism and outlet supply protected by pressure relief valve.

PRESSURE INDICATOR & WARNING WHISTLE

Bourdon tube type dial indicator Heat and Impact resistant polycarbonate lens

HOSES

Stainless steel swivel hose fittings Medium pressure hose Maximum working pressure 16 bar Minimum burst pressure 80 bar High pressure hose Maximum working pressure 450 bar Minimum burst pressure 800 bar

COMMUNICATIONS

Sabre-Com is a unique radio communications interface that fully integrates with your existing radio and preferred choice of Scott facemask. Sabre-Com is intrinsically safe and approved to EN136 Class 3.

OPTIONS

Scott Propak can be specified in many configurations including Duo, Split Demand Valve Coupling (SDC) and attachments for Airline, which can also be used for Rescue Second Man (RSM) and Decontamination.



High Performance Protection.

Approved to EN137: 2006 Type II, incorporating the stringent Flame Engulfment Test, Propak is refined to a level of performance demanded by the professional firefighter.

SPECIFICATIONS & ORDERING INFORMATION

PROPAK SELF CONTAINED BREATHING APPARATUS

Product Specifications

Weight

Single configuration (less cylinder) 3.0kg

Single configuration & Facemask (less cylinder) 3.6kg

Dimensions

Length 600mm Width 278mm Depth (with 6.8 litre 300 bar Cylinder) 200mm

PROPAK		
Part Number	Description	Application
Propak	EN137 Approved, Type II	Fire









