

Drawn / Date	App. by / Date	Date of issue	Rev.	DCN
TF 20/08/21	MS 20/08/21	20/08/21	A	21-018

NOMINAL BORE: DN25, DN40, DN50

MAX. WORKING PRESS.: 140 BAR

MATERIALS


BODY: CARBON STEEL S355J2G3
BALL + STEM: STAINLESS STEEL 1.4571/316Ti
SEALING: PLASTIC
SURFACE: ZINC PLATED DIN 50979

ADAPTER: BSP THREAD

FIELD OF APPLICATION: USED IN FIXED FIRE GAS SUPPRESSION SYSTEMS

TEMP. RANGE: -30°C TO + 50°C

FEATURES: HOLE FOR PADLOCK IN OPEN/CLOSE POSITION
2-OFF POSITION SWITCHES FOR OPEN/CLOSE POSITION

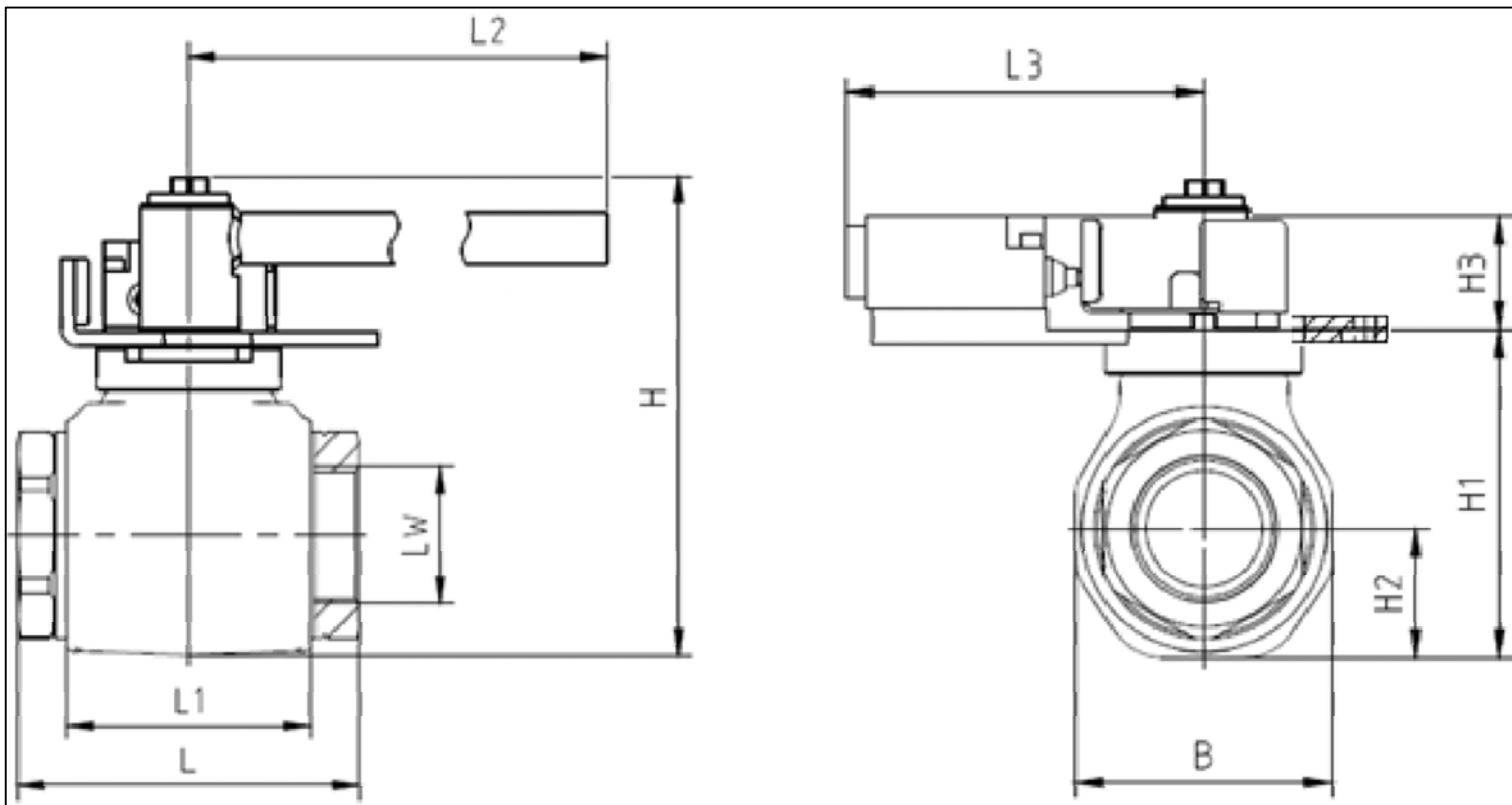

P/N	DN	PN (BAR)	LW (MM)	L (MM)	L1 (MM)	L2 (MM)	L3 (MM)	H (MM)	H1 (MM)	H2 (MM)	H3 (MM)	B (MM)
38-409830-005	25	140	Ø24	103	66.2	300 ± 3	112	130 ± 3	76	28.5	37	Ø74
38-409830-006	40	140	Ø38	120	85	450 ± 3	117	167 ± 3	107	42	37	Ø84
38-409830-007	50	140	Ø47.5	140	100	450 ± 3	117	186 ± 3	126	53.4	37	Ø107