

AASSN-0100

Alarmline II Analogue LHD Sensor w/ Nylon Sheath & Stainless Steel Braid, 100 m

General

The AASSN-0100 is an analogue linear heat detection cable in a Nylon outer sheath with a Stainless Steel braid, supplied in 100m lengths. Similar in character to the standard Nylon LHD sensor cable, the stainless steel braid provides additional mechanical protection for cables which could possibly suffer physical damage.

In temperature sensitive environments early detection of an abnormal change is crucial to protect safety of life, critical processes and reduce losses. The AA analogue range of linear heat detection cable use exceptionally durable linear heat detection technologies which provide extensive and continuous coverage, is easy to install and fully integrate with building management systems. The products offer an enviable set of features bringing enhanced benefits and increased safety to the fire protection industry worldwide.

Fast Response Time

This unique sensor cable and its method of control continuously responds to changes in temperature. The technology offers the facility to programme an early warning pre-alarm as well as the specified alarm temperature. If the temperature surrounding the cable reaches the pre-alarm point, the control unit triggers a warning giving the user time to survey the area at risk. Only when the temperature reaches the specified set alarm point will the control unit trigger full alarm.


The Controller

The optional two stage programmable alarm settings make the system and method of overheat detection incredibly flexible and ideal for use in a variety of different environments and applications. The technology automatically compensates for changes in the ambient temperature to maintain the accuracy of alarm temperature as well as offering up to 500 metres of continuous detection per control unit.

Both versions of control unit carry UL521 approval. One is a self-contained unit or, for finer control, a version requiring a PC prevents uninvited system access. Both designs are compatible with any conventional or addressable fire alarm panel or other building management system.

Reset and Reuse

Analogue LHD cable is "self-restorable" which means it not always necessary to replace the cable after an incident. Once the alarm has been triggered and depending on the severity of the incident the system can simply be reset with minimum disruption and inconvenience.

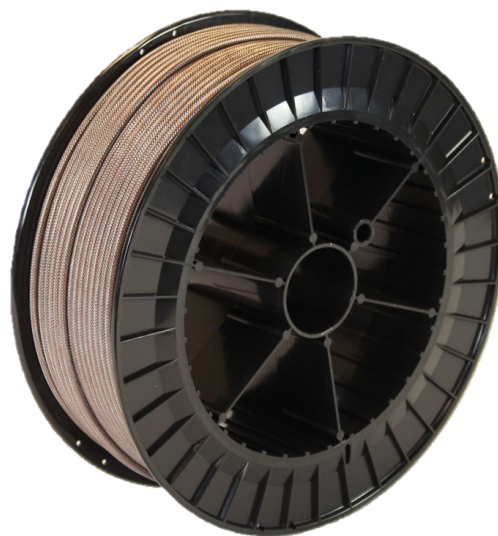

Details

- RoHS compliant and CE certified to meet end user specifications
- Open and short circuit detection reduces the risk of false alarms
- Optional pre-alarm setting allows the user to manage risk more effectively
- Cable based sensing allows detection at the point of risk
- Low installation and maintenance costs reduce total cost of ownership
- Suitable for installation in hazardous areas

AASSN-0100

Alarmline II Analogue LHD Sensor w/ Nylon Sheath & Stainless Steel Braid, 100 m

Technical specifications

Detection

Ambient Temperature upAlarm Temperature - 54°C to 30°C

Ambient Temperature upAlarm Temperatures - 64°C / 72°C / 79°C to 47°C

Ambient Temperature upAlarm Temperatures - 86°C / 100°C to 69°C

Physical

Net weight 3.300 kg

Environmental

Operating temperature -40 to +125°C

Relative humidity 0 to 90% noncondensing

Environment Indoor, Outdoor

Operating temperature limits -40°C to +125°C

Operating temperature (continuous) -40°C to +90°C

Relative humidity 0% to 99%

Standards & regulation

Certification CE

Mechanical


Outside diameter 6.05mm +/- 0.075mm (0.238" +/-0.003")
(Nominal)

No of cores 4

Core colours Red, White, Clear, Clear

Zone length (min to max) 30.5m to 500m

Weight 3.300kg

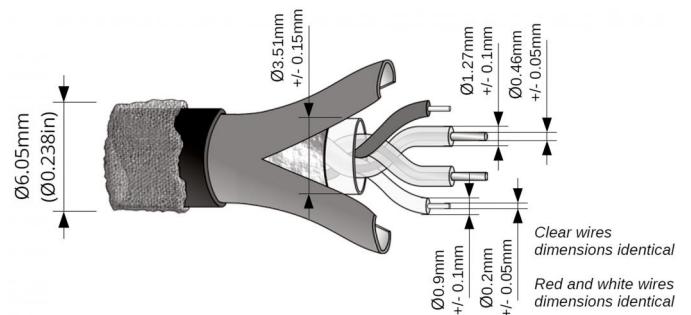

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative. sales@norrscope.com

Last updated on 16 March 2020 - 9:15



United Technologies

Climate | Controls | Security